



E

T

L

QUIPAGGIAMENTI
ECNICI
AVAGGIO

26.1100.20

SWIVEL AVVOLGITUBO


SWIVEL FOR HIGH PRESSURE HOSE REEL


27/10/2015

CARATTERISTICHE TECNICHE - SPECIFICATIONS

- PRESSIONE NOMINALE RATED PRESSURE	250 bar - 25 MPa (3650 psi)
- PRESSIONE CONSENTITA PERMISSIBLE PRESSURE	280 bar - 28 MPa (4050 psi)
- PORTATA MASSIMA MAX FLOW RATE	40 L/min (10.5 USG p.m.)
- TEMPERATURA MASSIMA MAX WORKING TEMPERATURE	160° C (320° F)
- MASSA WEIGHT	386 g (13.62 oz.)

MISURE D'INGOMBRO - OVERALL DIMENSIONS

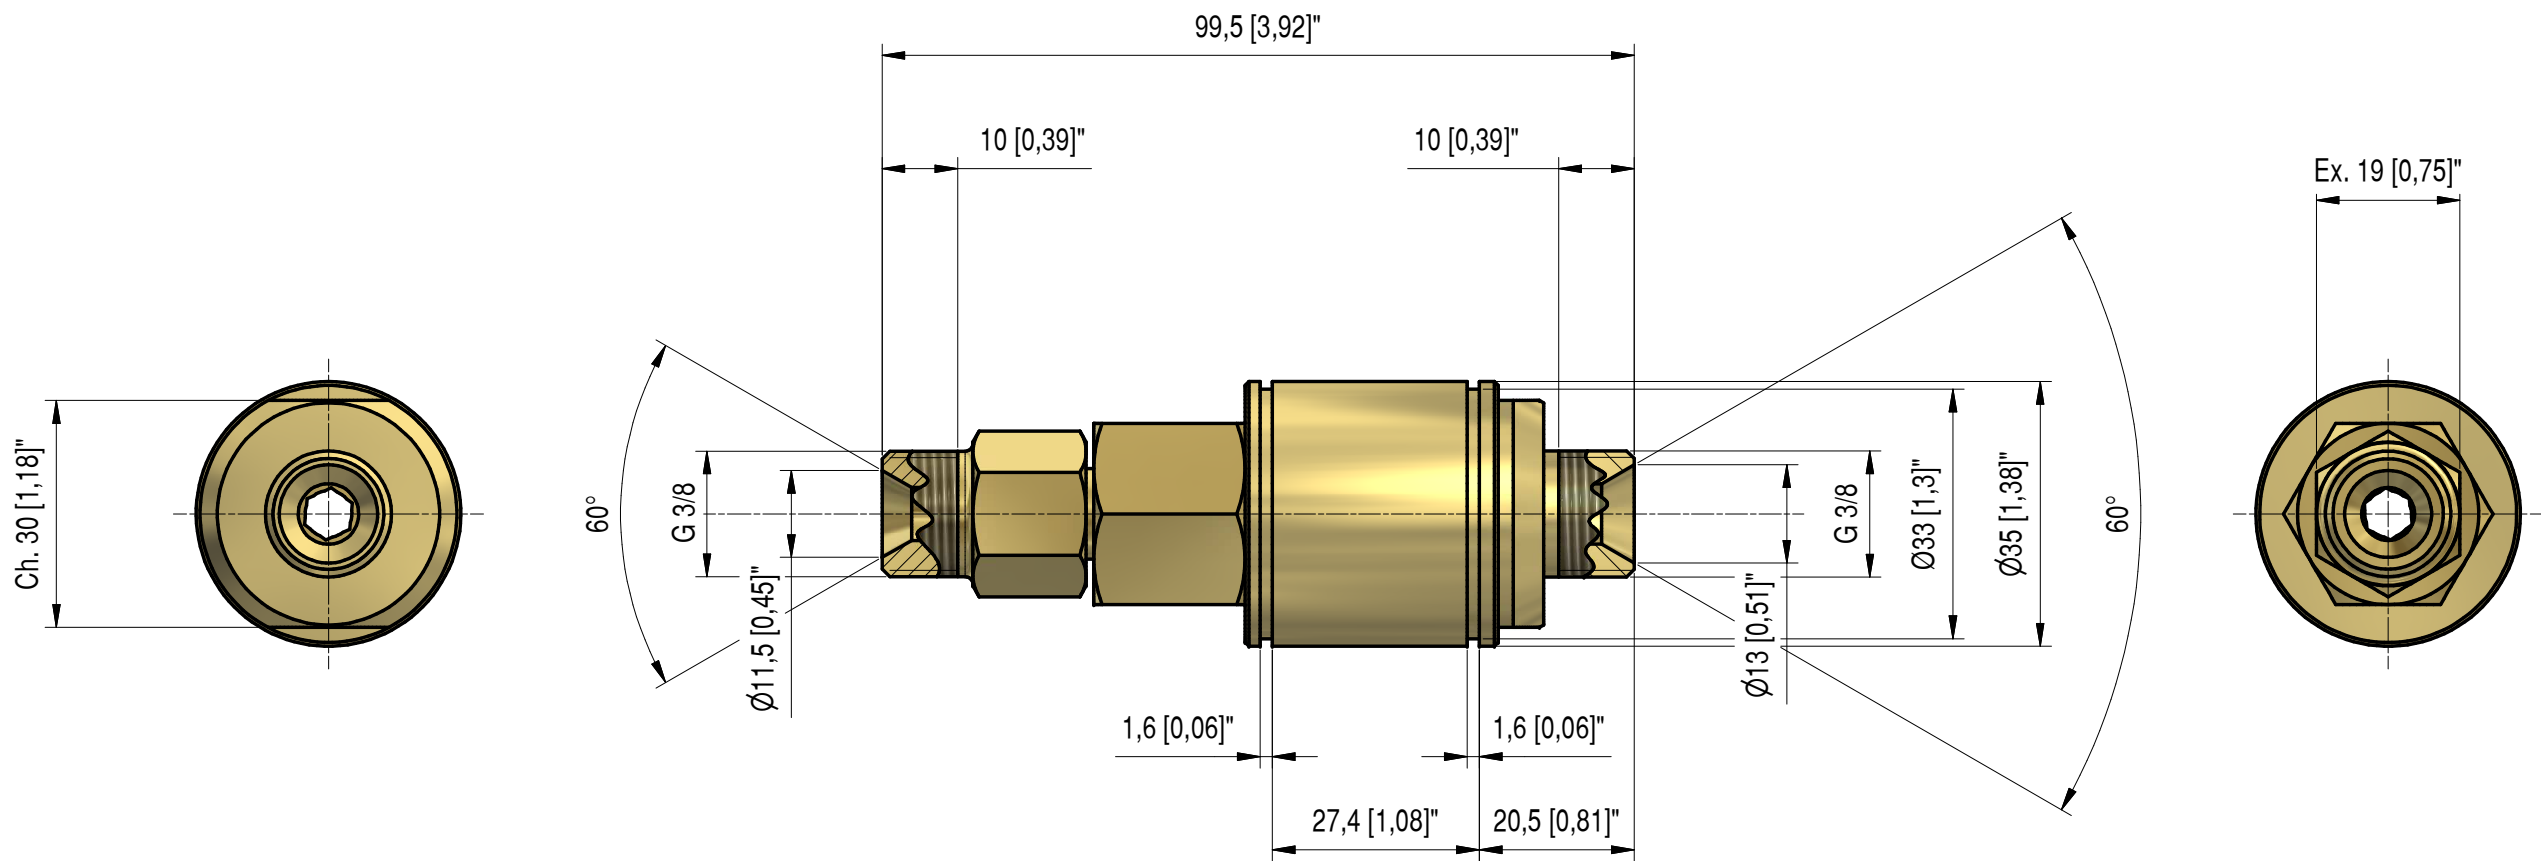




26.1100.30
SWIVEL AVVOLGITUBO
SWIVEL FOR HIGH PRESSURE HOSE REEL


27/10/2015

CARATTERISTICHE TECNICHE - SPECIFICATIONS

- PRESSIONE NOMINALE <i>RATED PRESSURE</i>	250 bar - 25 MPa (3650 psi)
- PRESSIONE CONSENTITA <i>PERMISSIBLE PRESSURE</i>	280 bar - 28 MPa (4050 psi)
- PORTATA MASSIMA <i>MAX FLOW RATE</i>	40 L/min (10.5 USG p.m.)
- TEMPERATURA MASSIMA <i>MAX WORKING TEMPERATURE</i>	160° C (320° F)
- MASSA <i>WEIGHT</i>	426 g (15.03 oz.)

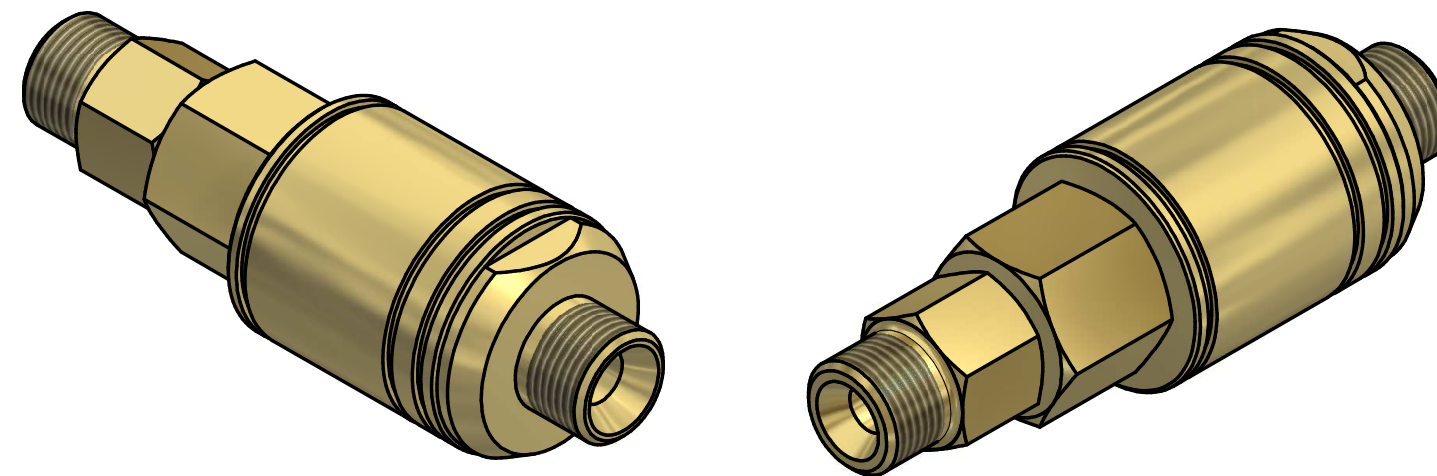

MISURE D'INGOMBRO - *OVERALL DIMENSIONS*

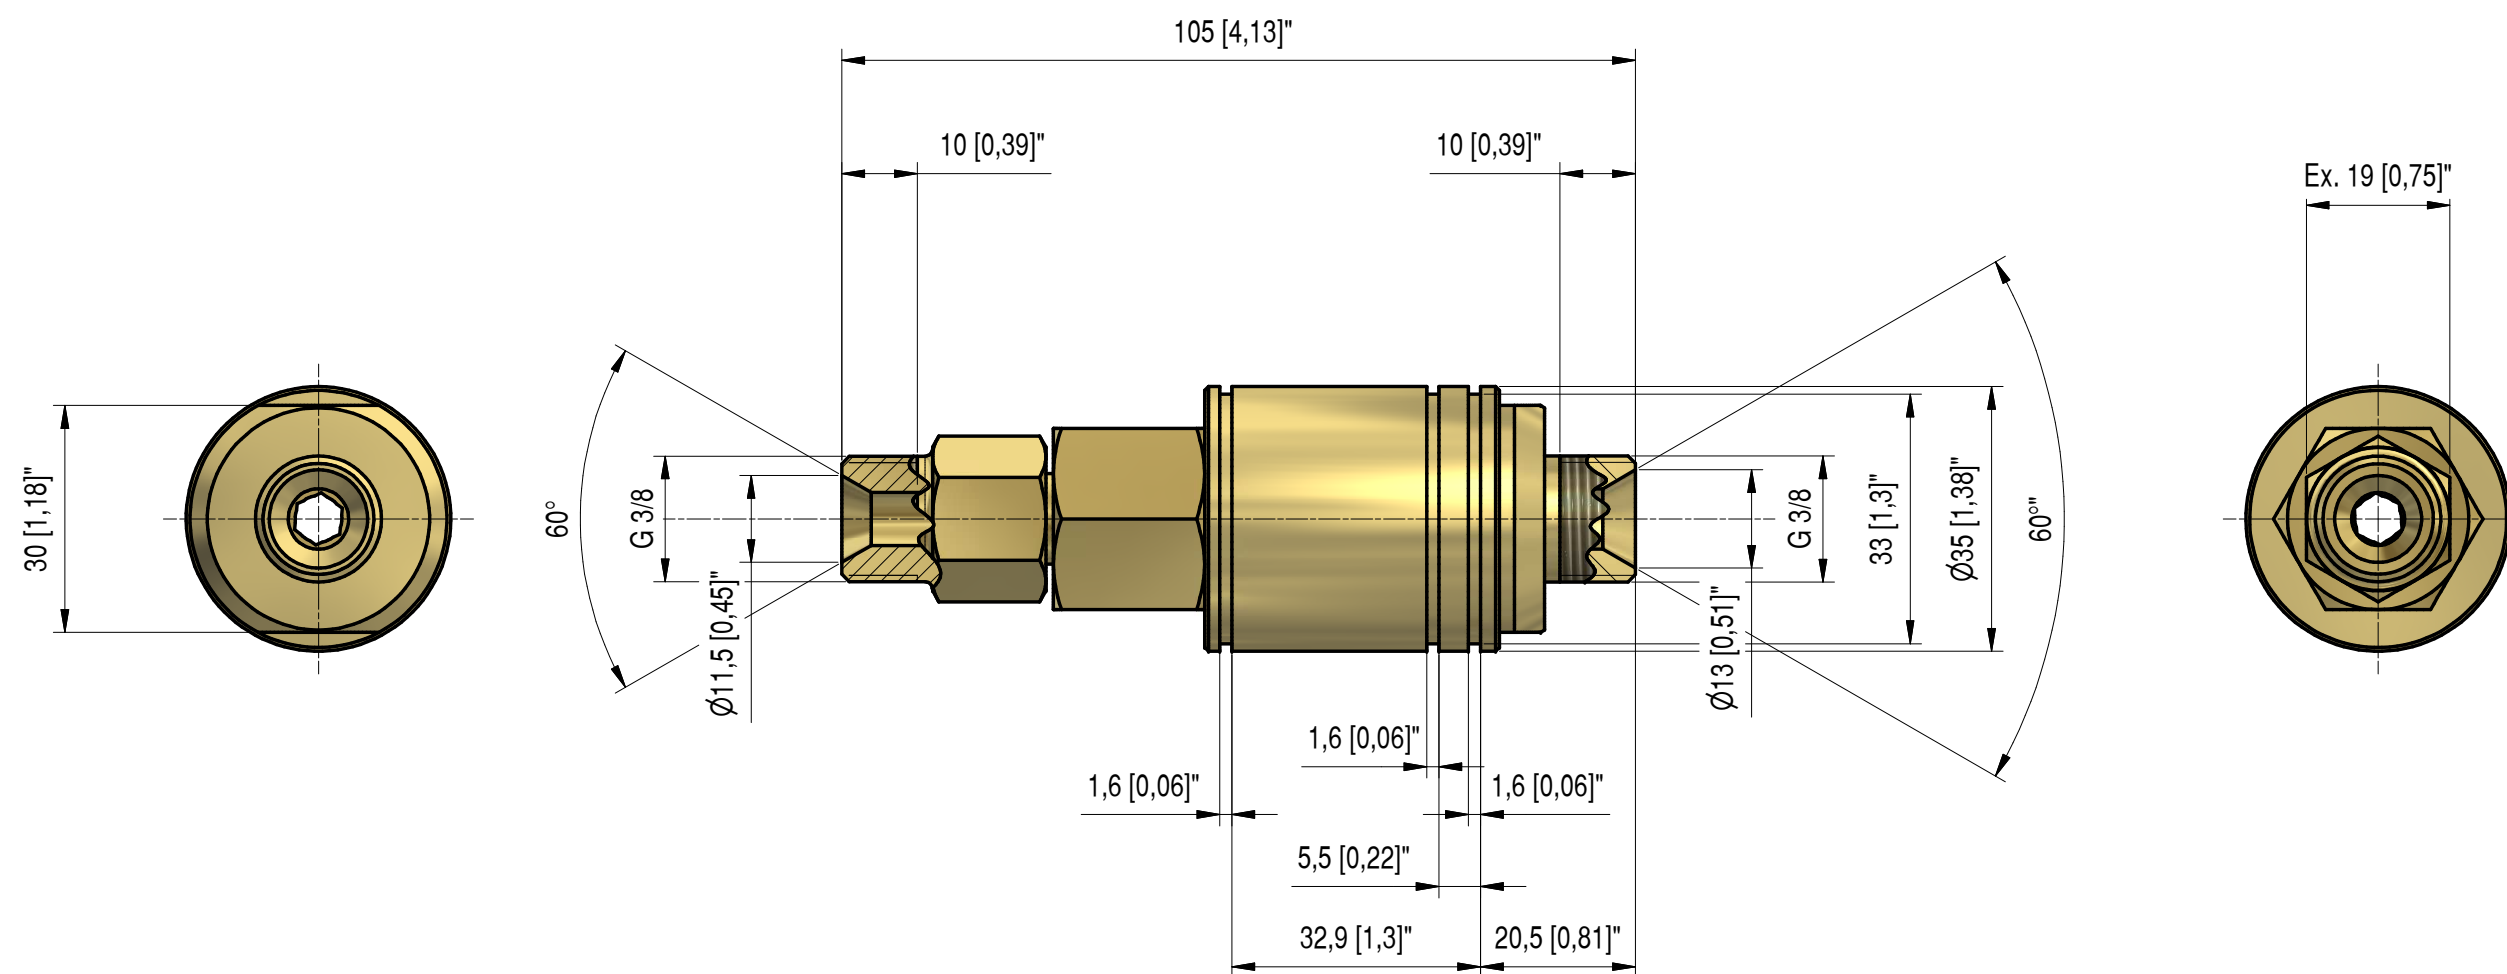



E

T

L

QUIPAGGIAMENTI
ECNICI
AVAGGIO

26.1150.00


SWIVEL AVVOLGITUBO INOX

S.S.T. SWIVEL FOR HIGH PRESSURE HOSE REEL

27/10/2015

CARATTERISTICHE TECNICHE - SPECIFICATIONS

- PRESSIONE NOMINALE RATED PRESSURE	250 bar - 25 MPa (3650 psi)
- PRESSIONE CONSENTITA PERMISSIBLE PRESSURE	280 bar - 28 MPa (4050 psi)
- PORTATA MASSIMA MAX FLOW RATE	40 L/min (10.5 USG p.m.)
- TEMPERATURA MASSIMA MAX WORKING TEMPERATURE	160° C (320° F)
- MASSA WEIGHT	397,1 g (14.01 oz.)

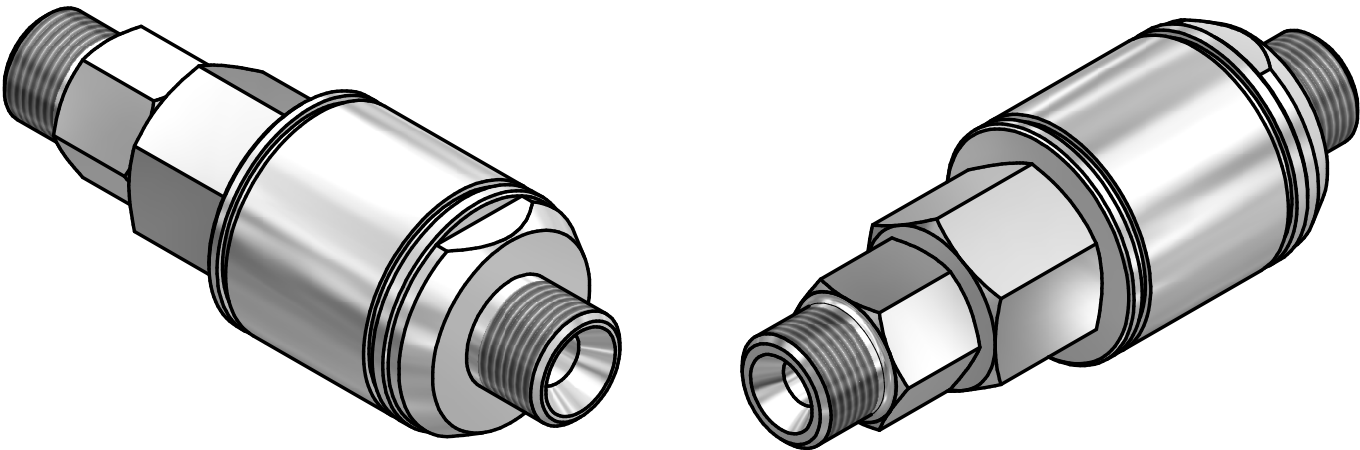

MISURE D'INGOMBRO - OVERALL DIMENSIONS

